

AT Power Throttles Ltd

Unit 9, Chestnut Drive
Wymondham,
Norfolk
NR18 9SB

Tel: +44 (0)1953 875800
Email: info@atpowerthrottles.com
Web: www.atpowerthrottles.com




Variohm Euro XPD D-Shaft - Programmable sensor

- 8 mm D-Shaft Rotary Sensor • Hall Effect non-contact technology
- Long life - extremely robust • Programmable angles from 20° up to 360°
- IP68 protection • Redundant output Specifications

Based on the well proven 28 mm diameter Euro-XP angle sensor. With programmable angle selection and redundant output this compact and contactless Hall Effect sensor features IP68 sealing and will suit arduous high-duty cycle position feedback applications in all areas of motorsports.

Mechanical	
Typical Life Cycle	>50 million movements (restriction by mechanics)
Torque	< 0.1 Ncm
Measuring range	360° redundant, signal 1 cw, signal 2 ccw
Housing	High grade temperature resistant plastic
D-Shaft	Nylon 66
Environmental	
Operating temperature	-40°C to +125°C (Short term 150°C)
Vibration	5...2000 Hz; Amax = 0.75 mm; amax = 20g to IEC 60068-2-6
IP rating	IP68 (minimum)
Supply Voltage	5V+/- 0.5V
Output signal	Ratiometric 5%...95% of supply (+/-25mv of specified electrical output range for both start & end voltage)
Independent linearity	+/-0.5% of each signal range
Isolation resistance	200 MΩ (500 VDC, 1 bar, 2s)
Cable type	Raychem Spec 55, 24 AWG; Sleeving - Raychem DR25

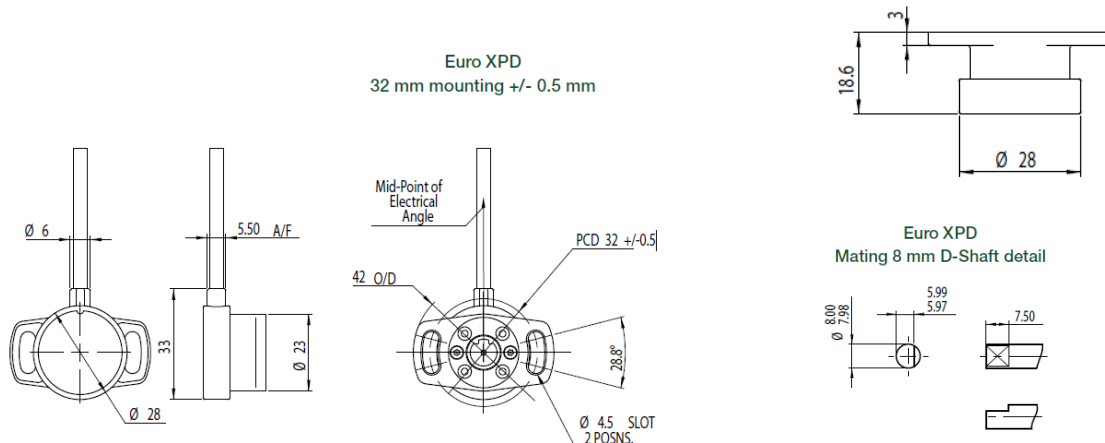

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regards to purchase orders, the agreed particulars shall prevail. AT Power does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.