
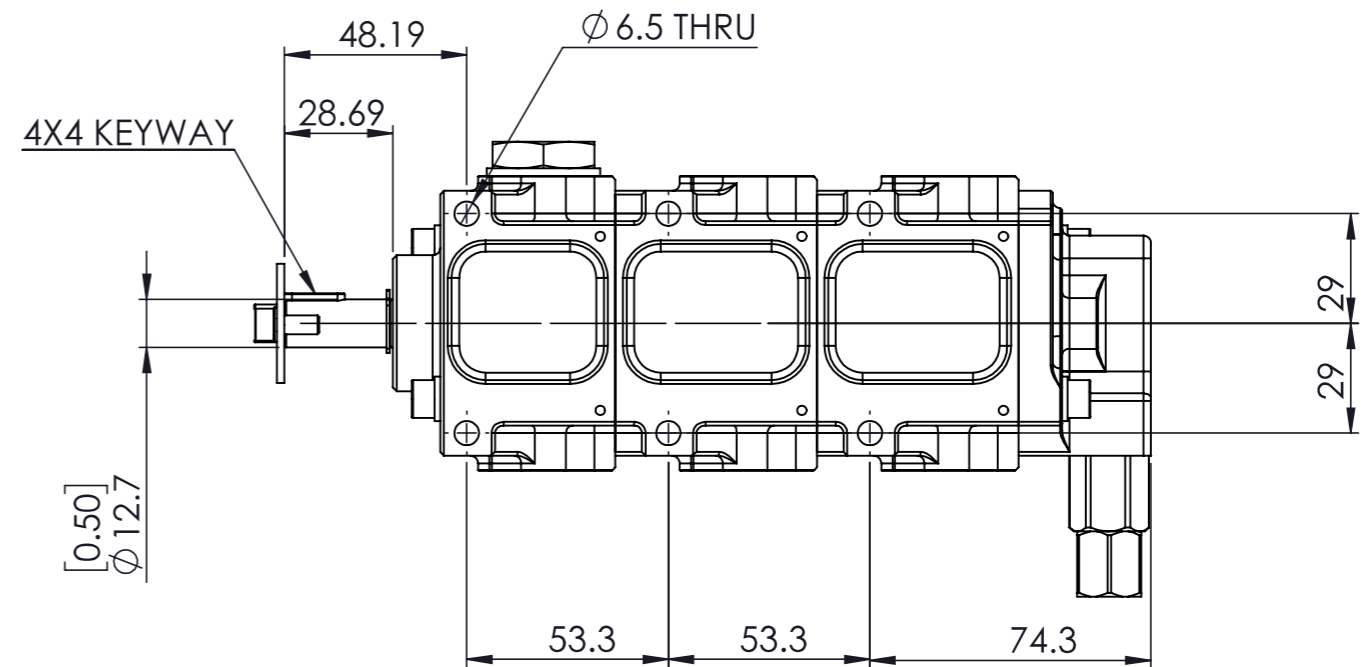
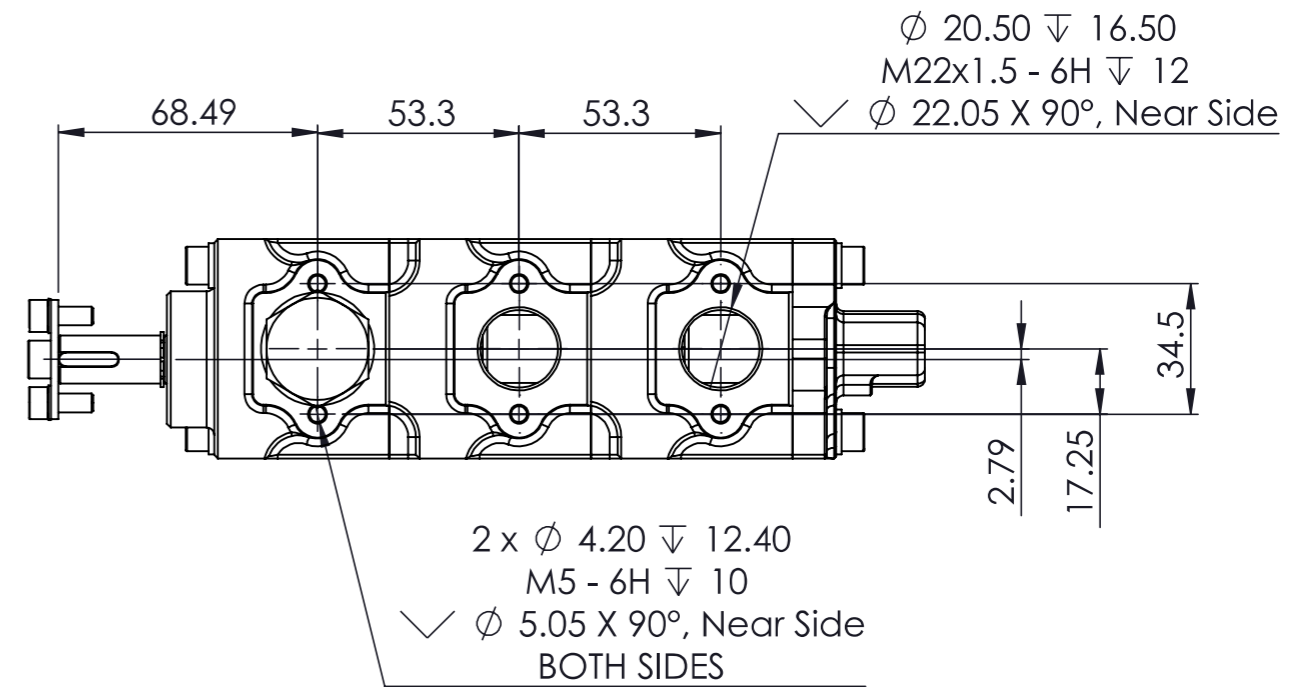
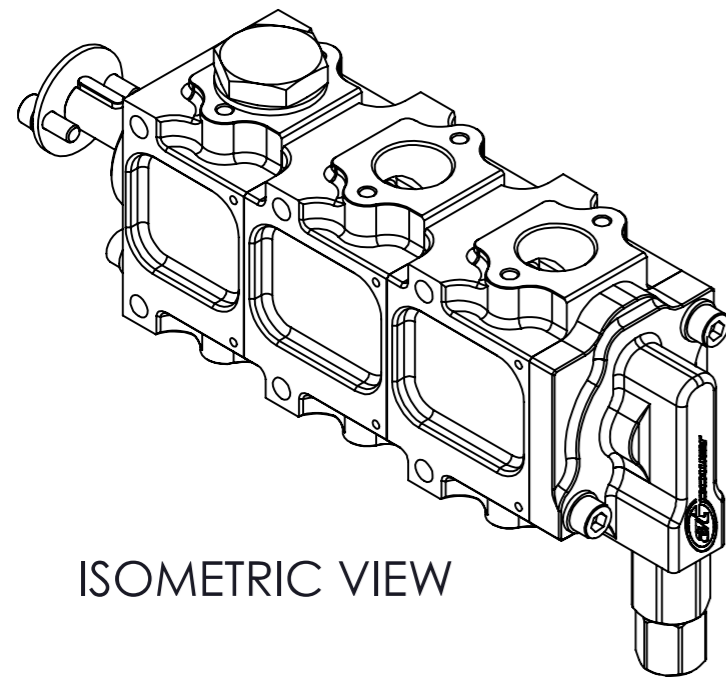


**NOTES:**

1. DISPLACEMENT PER REVERLUATION PER STAGE = 11.9 CC/REV
2. DISPLACEMENT AT 1000 RPM = 11.9 LT/MIN
3. PRV CRACKING PRESSURE:-  
 MINIMUM = 2.9 BAR (42 PSI)  
 MAXIMUM = 8.27 BAR (120PSI)
4. FOR EACH FULL TURN OF THE ADJUSTER THE CRACKING PRESSURE WILL INCREASE/DECREASE BY 0.25 BAR (3.6 PSI)

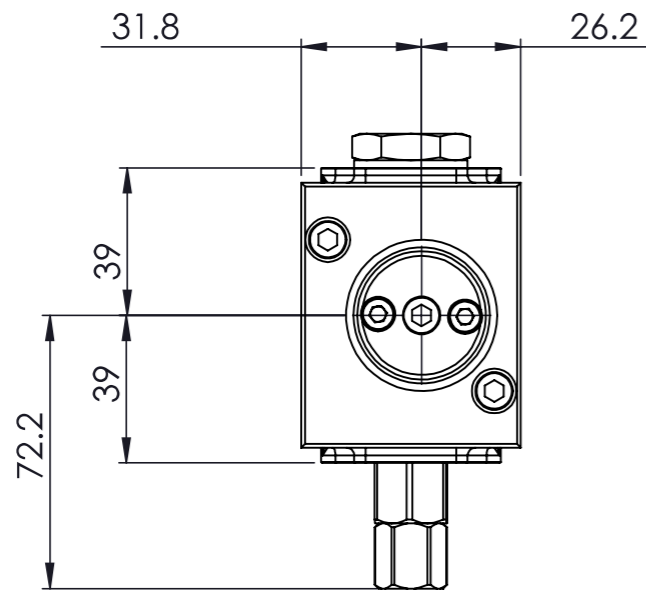

<p><b>AT power</b></p> <p><b>COPYRIGHT (c) 2013                  AT POWER LTD                  UNIT 9, CHESTNUT DRIVE, WYMONDHAM,                  NORFOLK, UK, NR18 9SB</b></p>	<p>THIRD ANGLE PROJECTION</p>	MATERIAL	SEE COMPONENT PARTS
		FINISH	SEE COMPONENT PARTS
<p>UNLESS OTHERWISE STATED:                  DIMENSIONS IN MILLIMETRES                  TOLERANCES: LINEAR ± 0.1 ANGULAR ± 0.5°                  SURFACE FINISH √ = √                  DRAWING STANDARDS TO ATQS 6003                  DATE FORMAT: DD/MM/YY</p>	SCALE	WEIGHT	DRAWING TITLE
	1:2	-- kg	
<p>THIS DESIGN IS THE PROPERTY OF                  ACTIVE TECHNOLOGIES LTD AND                  MUST NOT BE REPRODUCED OR                  COMMUNICATED WITHOUT                  AUTHORITY</p>	DRAWN-	S.HOW	DRAWING NUMBER
	DATE-	23/04/20	
<p>CAD PLOT                  DO NOT                  SCALE</p>	CHECKED -	S.HOW	SHEET 2 OF 2 A3
	APPROVED -	A.CLIFTON	